



Programming Manual

Changing callsign and analog 5-Tone iCOM

Version 0.3 | April 2021

Telecommunications Security Standards {TESS+}

www.wfp.org/telecommunications-security-standards

tess@wfp.org

Table of Contents

Table of Contents	2
Configuring the iCOM software.....	3
ICOM CS-F3160/F5060(HA).....	3
Changing callsign and Analog 5-Tone	4
iCOM CS-F3160/F5060(HA).....	4

Configuring the iCOM software

ICOM CS-F3160/F5060(HA)

Once the programming software has been installed on your computer, open it and make the following changes:

Changing callsign and Analog 5-Tone

iCOM CS-F3160/F5060(HA)

Open the UN standard codeplug (check with your colleagues or email tess@wfp.org to request a copy of the standard codeplug).


- Click **5-tones/Rx Code CH** to insert the allocated call sign for the Rx part.

CH	RX Code	Text	ID Dec	Bell	Emer Cancel	ABC	Dec EXO	AUX	Ringer	Auto TX	Aud	Stun	Scan	Field Clone
1	140406003	CALL	ON	ON					Chime 1 /R		Aud			ON
2	240406003	STUN	ON			3						Stun		ON
3	340406003	UNSTUN	ON			3						Revive		ON
4	440406003	INTERROGATE	ON			3								ON
5	99999	EMERGENCY !!	ON						PinPon /R					
6	6140406003	EMERGENCY EXIT	ON		ON									ON
7	91+++++	ACK												
8	+++++								OFF					
G	—	GROUP							Chime 3					

- Change the last 8 digits of RX Code with the country code and the identity of the radio.

CH	RX Code	Text
1	140406003	CALL
2	240406003	STUN
3	340406003	UNSTUN
4	440406003	INTERROGATE
5	99999	EMERGENCY !!
6	6140406003	EMERGENCY EXIT
7	91+++++	ACK
8	+++++	
G	—	GROUP

- o Click **5-tone/Tx Code CH** to insert the allocated call sign for the Tx part.

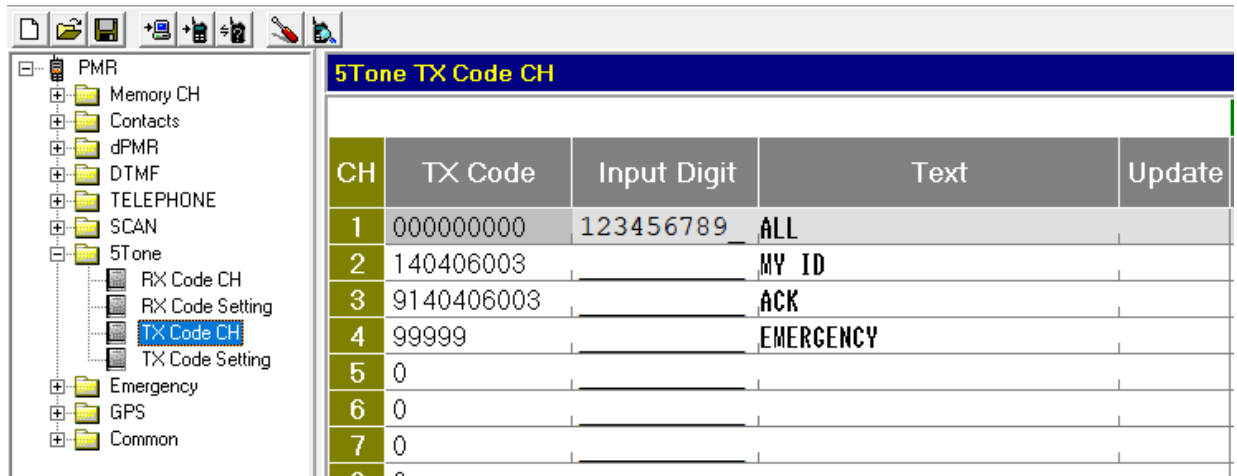

- o Change the last 8 digits of the two Tx code **MY ID, ACK** with the country code and the identity of the radio.

CH	TX Code	Input Digit	Text	Update
1	000000000	123456789	ALL	
2	140406003		MY ID	
3	9140406003		ACK	
4	99999		EMERGENCY	